

CURRENT LIMITING DDO FUSES

- 25.8KV, 25KA, 5-20A FOR MV NETWORKS

Fire Mitigation Solution – No Sparks or Molten Fragments Emitted from the Unit

SAFETY BENEFITS



- Silent interruption - no gas, sparks, or debris emitted
- Significant fire risk reduction - perfect for preventing wildfires in dry or drought-stricken areas
- Significant vegetation maintenance reduction - eliminates the need to maintain mowed grass radius beneath poles
- Increased safety to line personnel during circuit re-energizing operation Simplified fault location with Drop-open design

FEATURES

- Universal fit design makes for an easy retrofit into industry standard 125kV BIL and 150kV BIL interchangeable cutouts
- No special tools required - Easy hotstick installation from the ground
- No arc and no explosion noise
- High breaking reliability & highspeed breaking possible (within 0.5 cycles)
- Can also operate with short circuit currents & overload currents (more than 3 times the rated current)
- Sealed structure, resistant against moisture absorption & salt damage
- Improved heat/humidity/flame resistance by using ceramic tubes
- Reusable end fittings reduce weight carried in fault vehicles and reduce landfill waste
- Available as:
 - Complete fuse assemblies (including metal end fittings)
 - Replacement fuse tubes
 - Replacement end fittings
- Custom size fuses available (conditions apply)

APPLICATION LOCATIONS

- Feeder circuits
- Metal-enclosed switchgear
- Pad-mounted switches
- Overhead capacitor racks
- Power Transformers, Distribution Transformers, Potential Transformers and Station Service Transformers

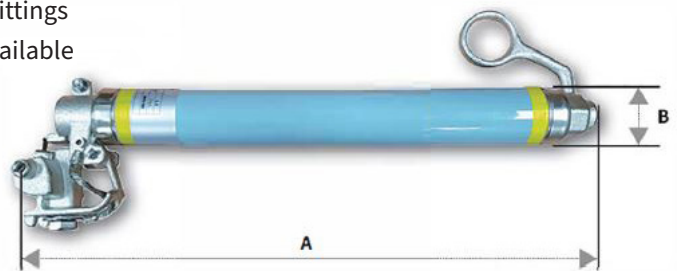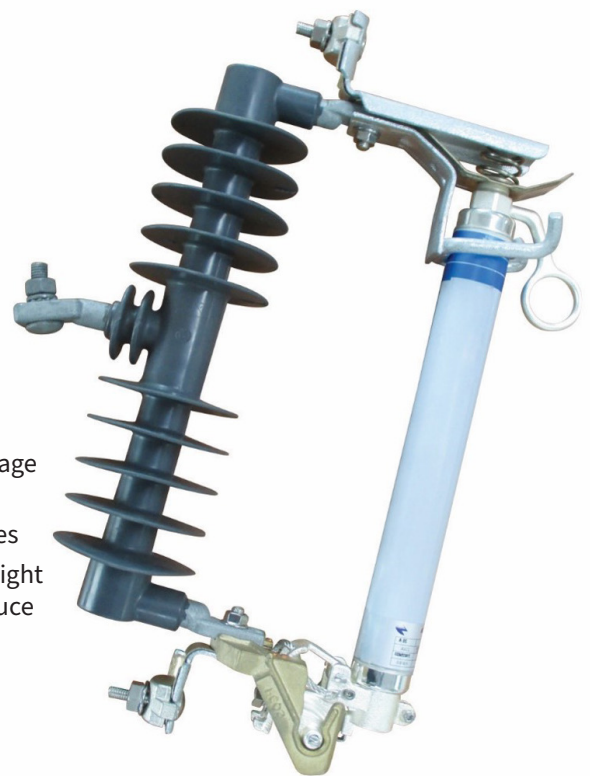

STANDARDS

- IEC 60282-1(2009) High voltage fuses, current limiting fuses
- KS C 4612 High voltage current limiting fuse

Name	Rated Voltage (kV)	Rated Current (A)	Colour Code	Breaking Current (kA)	Minimum Breaking Current (A)	Weight (kg)	Cold Resistance (mΩ)	A (mm)	B (∅)
CF25F5A	25.8	5	Yellow	25	16	1.6	961	377.5	40
CF25F8A		8	Purple		24		783		
CF25F10A		10	Green		30		489		
CF25F16A		16	Red		48		246		
CF25F20A		20	Blue		62		160		